



# SUPERSTAR CBB

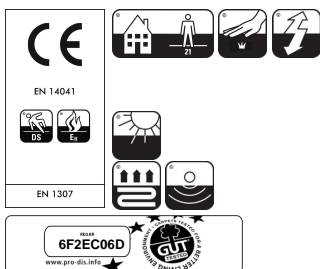

<p><b>CONSTRUCTION</b> 9/64"LP multiroll</p> <p><b>PILE MATERIAL</b> PP 100 %</p> <p><b>SECONDARY BACKING</b> Comfortback Basic</p> <p><b>TOTAL WEIGHT</b> Ca. 1385 g/m<sup>2</sup></p> <p><b>PILE WEIGHT</b> Ca. 500 g/m<sup>2</sup></p> <p><b>PILE LENGTH</b> Ca. 4,0 mm</p> <p><b>TOTAL HEIGHT</b> Ca. 7,2 mm</p> <p><b>PILE HEIGHT</b> Ca. 3,3 mm</p> <p><b>TUFT DENSITY</b> Ca. 145.000 /m<sup>2</sup></p> <p><b>FIRE RESISTANCE</b> EN 13501-1 E<sub>fl</sub></p> <p><b>FASTNESS TO LIGHT</b> ISO 105-B02 &gt;5</p> <p><b>THERMAL RESISTANCE</b> ISO 8302 0,110 m<sup>2</sup> K/W</p> <p><b>IMPACT NOISE RATING</b> ISO 140-8 23 dB</p> <p><b>PERMANENT ANTISTATIC</b> ISO 6356 ≤ 2 kV</p> <p><b>USAGE</b> bedrooms, living rooms, dining rooms</p>	<p><b>STRUCTURE</b> 9/64"LP multiroll</p> <p><b>COMPOSITION DU VELOURS</b> PP 100 %</p> <p><b>DOSSIER</b> Comfortback Basic</p> <p><b>POIDS TOTAL</b> Ca. 1385 g/m<sup>2</sup></p> <p><b>POIDS DU VELOURS</b> Ca. 500 g/m<sup>2</sup></p> <p><b>LONGUEUR DE TOUFFE</b> Ca. 4,0 mm</p> <p><b>EPAISSEUR TOTALE</b> Ca. 7,2 mm</p> <p><b>EPAISSEUR DU VELOURS</b> Ca. 3,3 mm</p> <p><b>NOMBRE DE TOUFFES</b> Ca. 145.000 /m<sup>2</sup></p> <p><b>COMPORTEMENT AU FEU</b> EN 13501-1 E<sub>fl</sub></p> <p><b>SOLIDITÉ À LA LUMIÈRE</b> ISO 105-B02 &gt;5</p> <p><b>RÉSISTANCE THERMIQUE</b> ISO 8302 0,110 m<sup>2</sup> K/W</p> <p><b>ISOLATION PHONIQUE</b> ISO 140-8 23 dB</p> <p><b>ANTISTATIQUE PERMANENT</b> ISO 6356 ≤ 2 kV</p> <p><b>UTILISATION</b> chambres à coucher, salles de séjour, salles à manger</p>	<p><b>STRUKTUR</b> 9/64"LP multiroll</p> <p><b>POLMATERIAL</b> PP 100 %</p> <p><b>RÜCKENAUSSTATTUNG</b> Comfortback Basic</p> <p><b>GESAMTGEWICHT</b> Ca. 1385 g/m<sup>2</sup></p> <p><b>POLEINSATZGEWICHT</b> Ca. 500 g/m<sup>2</sup></p> <p><b>POLHÖHE</b> Ca. 4,0 mm</p> <p><b>GESAMTDICKE</b> Ca. 7,2 mm</p> <p><b>POLDICKE</b> Ca. 3,3 mm</p> <p><b>NOPPENZAHL</b> Ca. 145.000 /m<sup>2</sup></p> <p><b>BRENNVERHALTEN</b> EN 13501-1 E<sub>fl</sub></p> <p><b>LICHTECHTHEIT</b> ISO 105-B02 &gt;5</p> <p><b>WÄRMEDURCHLAßWIDERSTAND</b> ISO 8302 0,110 m<sup>2</sup> K/W</p> <p><b>TRITTSCHALLVERBESSERUNGSMAß</b> ISO 140-8 23 dB</p> <p><b>PERMANENT ANTISTATISCH</b> ISO 6356 ≤ 2 kV</p> <p><b>EINSATZ</b> Schlafzimmer, Wohnzimmer, Esszimmer</p>	<p><b>STRUCTUUR</b> 9/64"LP multiroll</p> <p><b>POOLMATERIAAL</b> PP 100 %</p> <p><b>RUG</b> Comfortback Basic</p> <p><b>TOTAAL GEWICHT</b> Ca. 1385 g/m<sup>2</sup></p> <p><b>POOLGEWICHT</b> Ca. 500 g/m<sup>2</sup></p> <p><b>POOLLENGTE</b> Ca. 4,0 mm</p> <p><b>TOTALE DIKTE</b> Ca. 7,2 mm</p> <p><b>POOLHOOGTE</b> Ca. 3,3 mm</p> <p><b>AANTAL NOPPEN</b> Ca. 145.000 /m<sup>2</sup></p> <p><b>BRANDGEDRAG</b> EN 13501-1 E<sub>fl</sub></p> <p><b>LICHTECHTHEID</b> ISO 105-B02 &gt;5</p> <p><b>WARMTEDOORLAATWEERSTAND</b> ISO 8302 0,110 m<sup>2</sup> K/W</p> <p><b>GELUIDSISOLATIE</b> ISO 140-8 23 dB</p> <p><b>PERMANENT ANTISTATISCH</b> ISO 6356 ≤ 2 kV</p> <p><b>GEBRUIK</b> slaapkamers, leefkamers, eetkamers</p>
---	--	---	--

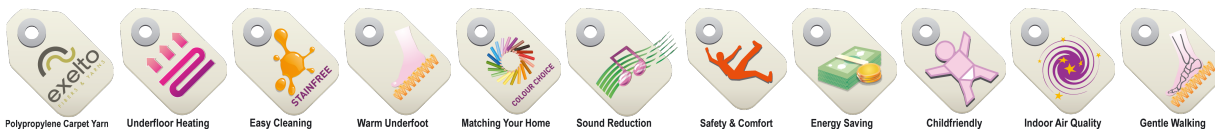

	103	140	310	316	500	837	851	858	888	965
3m	✓		✓			✓			✓	✓
4m	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
5m	✓	✓	✓	✓	✓	✓		✓	✓	✓

MAINTENANCE: Spillage should be taken up promptly and surface stains removed by an appropriate method as soon as possible. In heavy traffic areas the carpet should be cleaned daily with a vacuum cleaner. Periodic maintenance should be carried out by professional cleaning staff using appropriate extraction systems. COLOUR MARCHING: As with all textile products there will be a variance in shade from batch to batch. Any samples supplied are as close a representation to the actual carpet as the production process will allow. An exact colour match between different dye batches cannot be guaranteed.

Contact: [domo@baltagroup.com](mailto:domo@baltagroup.com) | [www.baltagroup.com](http://www.baltagroup.com)

RES-CF50 4/10